

AUTOMATIC TAPING MACHINE

COM[®] RA-200

STAND-ALONE TYPE USING ADHESIVE TAPE · SEMI ADHESIVE TAPE

■ FEATURES

- Using adhesive tapes, secure banding around slippery workpieces is resulted.
- Tapes available on the market can be used.
- Semi-adhesive tapes (masking tapes) will not damage the product surface. Only negligible thin film of bond remains there after removing banded tapes.
- Single winding, double winding or triple winding can be selected.
- Operations can be started as soon as the power switch is turned on.
- Due to the through-hole design, even long bars can be banded.

■ CAPABILITY

Product size	Max. (width 200mm, height 160mm)
Speed	25 cycles/minute (single winding of tapes)
Winding mode	SINGLE/DOUBLE/TRIPLE (using selector switch)


■ MACHINE SPECIFICATIONS

Width	920mm
Height	1425mm (table height 912mm)
Depth	603mm
Weight	120kg
Power supply	220/230/240V 50Hz/60Hz (rated power consumption 300W)
Air pressure	0.5MPa
Air consumption	39dm ³ /min (ANR)

■ TAPE SPECIFICATIONS

Type	Adhesive tape · Semi adhesive tape
Width	12mm~50mm (tape reel outside diameter 250mm)

- Special models can be designed and produced.
- Specifications subject to change without notice.

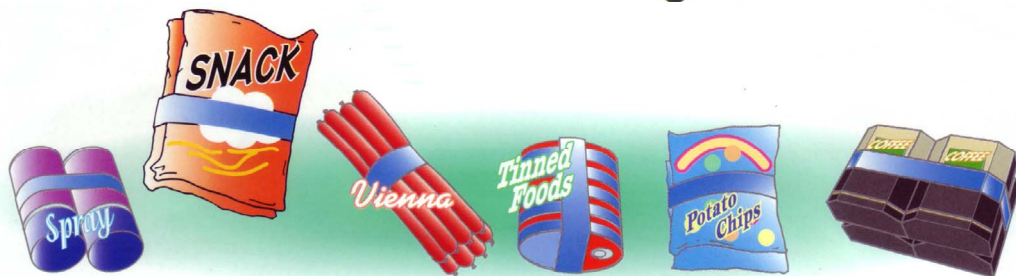

COM is Communication.

TAIYO SEIKI CO., LTD.

Head Office: 4-3-7, Hino, Daitoh, Osaka, 574-0062, Japan.
Phone: 81-72-873-3739 Fax: 81-72-875-4324
U R L : <http://www.com-machine.co.jp>
E-mail: taiyo@com-machine.co.jp